

MINIMUM - MAXIMUM BLADE SPANS AT A GLANCE AS DETERMINED BY WIND SPEED.
REFER TO SECTION 11 ENGINEERING REPORTS FOR FULL DETAILS ON BLADE SPANS.


















































EXTRA HIGH WIND
SPEED 198KM/H 55M/S



LOW WIND SPEED
115KM/H 32M/S



AIRFOIL SUN LOUVRES

9 DIFFERENT STYLES	MAXIMUM SPANS	OPERABLE
 70 MINI LOUVRE	1300MM  1900MM 	  
 90 MIDI LOUVRE	1400MM  2000MM 	  
 150 MIDI LOUVRE	1900MM  2750MM 	   
 120 AIRFOIL LOUVRE	1600MM  2300MM 	  
 180 AIRFOIL LOUVRE	2050MM  2950MM 	  
 200 MAXI LOUVRE	2350MM  3700MM 	  
 300 MAXI LOUVRE	3350MM  4800MM 	  
 600 MAXI LOUVRE	3700MM  5800MM 	  

RECTANGULAR SUN LOUVRES SPANS AT A GLANCE

MINIMUM - MAXIMUM BLADE SPANS AT A GLANCE AS DETERMINED BY WIND SPEED. REFER TO SECTION XX ENGINEERING REPORTS FOR FULL DETAILS ON BLADE SPANS.

EXTRA HIGH WIND SPEED 198KM/H 55M/S



LOW WIND SPEED 115KM/H 32M/S




RECTANGULAR SUN LOUVRES


9 DIFFERENT STYLES

MAXIMUM SPANS


OPERABLE



120 FLUSH PANEL




200 FLUSH PANEL

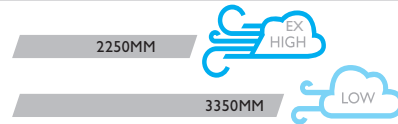



125 WEATHERBOARD




180 WEATHERBOARD

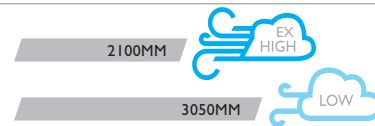


150 HELENA BAY

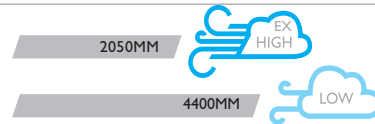


95 BELLA VISTA



95 BELLA VISTA HEAVY



135 HI SPAN

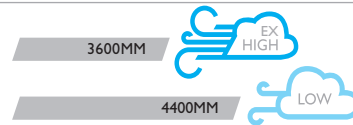

165 HI SPAN



ULTRA 50 RECTANGULAR SUN LOUVRES SPANS AT A GLANCE

MINIMUM - MAXIMUM BLADE SPANS AT A GLANCE AS DETERMINED BY WIND SPEED.
REFER TO SECTION 11 ENGINEERING REPORTS FOR FULL DETAILS ON BLADE SPANS.

































EXTRA HIGH WIND
SPEED 198KM/H 55M/S



LOW WIND SPEED
115KM/H 32M/S



ULTRA 50 RECTANGULAR SUN LOUVRES

6 DIFFERENT STYLES	MAXIMUM SPANS	OPERABLE
 RL 300 SQUARE	4050MM  5800MM 	  
 RL 450 SQUARE	4050MM  5800MM 	  
 RL 600 SQUARE	4050MM  5800MM 	  
 RL 300 MITRE	4050MM  5800MM 	  
 RL 450 MITRE	4050MM  5800MM 	  
 RL 600 MITRE	4050MM  5800MM 