

The SILKRISE 42 internal manual system is a premium quality roller blind for small to medium windows in both domestic and commercial applications. The Japanese made mechanism achieves near effortless operation with faster than 1:1 gearing, enabling a silky smooth light touch feel.


Compact and attractive end brackets help ensure discreet integration into modern interiors.



SYSTEM SPECIFICATIONS

Minimum width	600mm
Maximum width	2800mm
Maximum drop	3200mm
Spring assist	All blinds come with spring assist
Linkable	Yes, 2 medium or 3 small blinds
Dual brackets	Yes
Gear ratio	1 : 1.6 with standard tube 1 : 1.9 with Heavy Duty tube (48mm diametre)
Minimum recess dimensions (for single blinds)	Width 100mm / Height 90mm
Light gaps (see diagram)	Control side 21mm Idle end side 16mm Between linked blinds 29mm

Light gaps

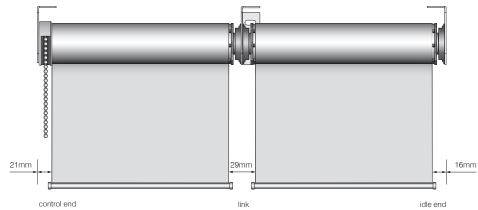

TECHNICAL INFORMATION: BASEBARS

Size	The Force – Silent 31x13mm, Premium 33x13mm Oval 26x15mm, Round 22mm
Standard colours	Anodised, White, Shoji White, Barrister White, Barley, Dune, Black
Options	Custom powder coating available



The Force – Silent 31x13mm

Premium 33x13mm

Oval 26x15mm Round 22mm


TECHNICAL INFORMATION: BRACKETS

Size	38 x 30mm fixing plate 60mm or 70mm projection
Standard colours	White, Black, Silver
Options	Dual blind brackets available

TECHNICAL INFORMATION: ROLLER TUBE

Roller tube	42mm extruded aluminium 1.5mm wall thickness Heavy duty tube option: 48mm with 3mm wall
Chain	Stainless steel chain only

Single brackets








Spring side bracket

Dual brackets



Slimline (Must be installed with longest side at the top)

TECHNICAL INFORMATION: OPTIONAL FASCIA / PELMET

95mm Rounded pelmet

Details Includes top which keeps off dust (85mm)
Top or Face Fix brackets
3mm wide endcaps

Standard colours White, Black, Anodised

100mm Flat fascia

Details

Top or Face Fix (face fix with the endcaps)

4mm wide endcaps

Standard colours

White, Black, Anodised

